

# LIFT-RITE

A TRADITION OF QUALITY,  
DURABILITY, AND VALUE,  
IN PEDESTRIAN CONTROLLED  
VEHICLES



- ✓ -3/8" Thick Formed Steel Mast Channels
- ✓ -Automatic Built-in Battery Charger
- ✓ -LED Battery Charge Indicator
- ✓ -Solid Steel Adjustable Forks
- ✓ -Mechanical Stacker Positioners

## STACKERS - OPTIONS AND SPECIFICATIONS



**Work platform** - For maintenance work at raised levels. Equipped with fork pockets for quick fit to your Lift-Rite stacker. Recommended remote control with coil cord for work platform applications.



**Slip on platform** - Provides a work surface that can be raised or lowered to suit various applications.



**Optional Power Requirement** - 12 volt DC battery with LED battery indicator (standard), 110 volt AC, 220 volt AC, or Air motor unit.




**5th Wheel** - Enhances the mobility and handling of the push stacker for precise and/or tight steering.

Other optional attachments - Drum handler, Boom with swivel hook, Roller conveyor bed.

## SINGLE STAGE STACKER MODELS

MODEL	LL68 (SINGLE STAGE)	LL90 (SINGLE STAGE)
CAPACITY(LBS)	*1500/2000/2500	*1500/2000
RAISED HEIGHT	68"	90"
LOAD CTR.	24"	24"
FORK LENGTH	36"/42"/48"	36"/42"/48"
STRADDLE I.D.	26" - 50"	26" - 50"
STRADDLE O.D.	32" - 56"	32" - 56"
OVERALL HEIGHT FORKS LOWERED	*82"/87"	*104"/109"
OVERALL HEIGHT FORKS RAISED	*82"/87"	*104"/109"
EXTERNAL CASTERS ADD 16" TO WIDTH	NO	NO
STRADDLE LENGTH	30 1/2"	30 1/2"
WEIGHT(LBS)	640 - 870	700 - 750

\*Denotes applicable dimensions for particular model capacity.

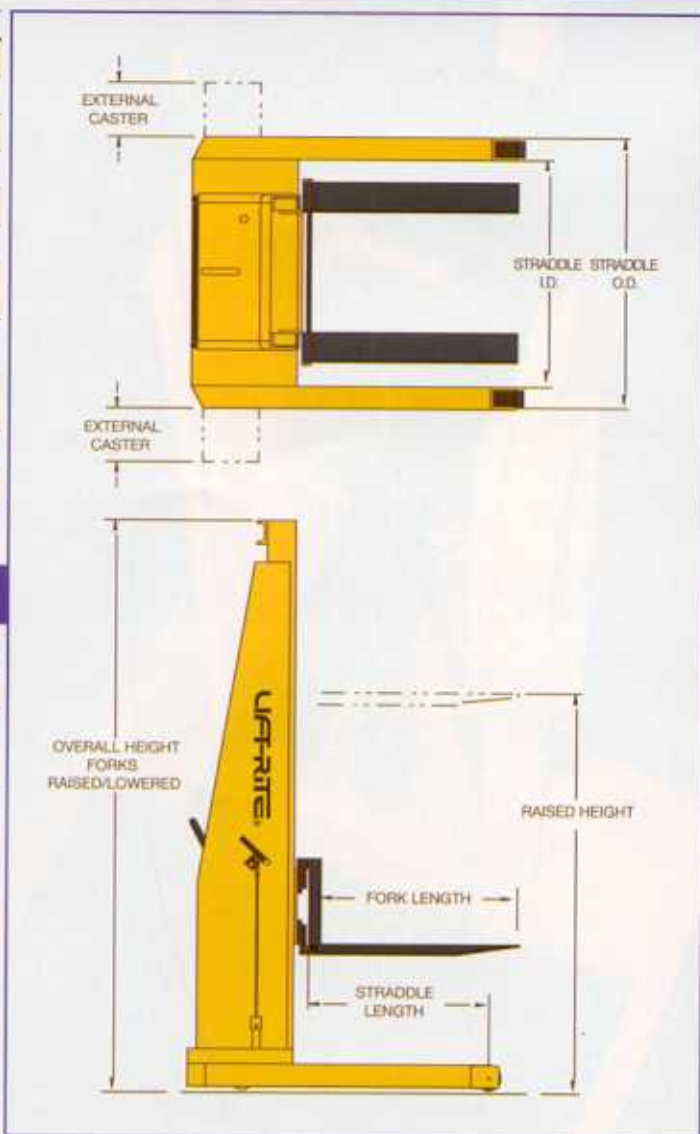

## TELESCOPIC STACKER MODELS

MODEL	LT132 (TWO STAGE)	LT144 (TWO STAGE)	LT156 (TWO STAGE)	LT168 (TWO STAGE)
CAPACITY(LBS)	1500/2000/*2500	1500/2000	1500/2000	1500/2000
RAISED HEIGHT	132" (11 FT)	144" (12 FT)	156" (13 FT)	168" (14 FT)
LOAD CTR.	24"	24"	24"	24"
FORK LENGTH	36"/42"/48"	36"/42"/48"	36"/42"/48"	36"/42"/48"
STRADDLE I.D.	42" - 50"	42" - 50"	52"	54"
STRADDLE O.D.	48" - 56"	48" - 56"	58"	60"
OVERALL HEIGHT FORKS LOWERED	88"/*93"	94"	100"	106"
OVERALL HEIGHT FORKS RAISED	154"/*159"	166"	178"	190"
EXTERNAL CASTERS ADD 16" TO WIDTH	NO	NO	YES	YES
STRADDLE LENGTH	30 1/2"	30 1/2"	30 1/2"	30 1/2"
WEIGHT(LBS)	1000 - 1170	1150 - 1200	1350 - 1400	1550 - 1600

\*Denotes applicable dimensions for particular model capacity.

PLEASE CONSULT YOUR AUTHORIZED LIFT-RITE DEALER FOR SPECIAL DESIGN STACKER APPLICATIONS.

# LIFT-RITE®

Due to LIFT-RITE'S continuing product development program, specifications are subject to change without notice. Contact your authorized LIFT-RITE dealer to confirm the most recent specifications.